




ASSEMBLY INSTRUCTIONS Model 98-C/2 Canopy

CAUTION: A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT MUST INSTALL THIS FIXTURE IN ACCORDANCE WITH ALL APPLICABLE LOCAL CODES AND WITH FULL KNOWLEDGE OF THE HAZARDS INVOLVED.

WARNING: THE ELECTRICITY MUST BE DISCONNECTED AT THE MAIN FUSE BOX OR CIRCUIT BREAKER PANEL BEFORE INSTALLATION OF THIS CANOPY – TURNING THE POWER OFF USING THE LIGHT SWITCH IS NOT SUFFICIENT TO PREVENT ELECTRICAL SHOCK. THIS CANOPY SHOULD NOT BE INSTALLED ON A RADIANT TYPE CEILING.

Installation:

1. Loosen canopy screw (7) and insert the electrical wire from the pendant.
2. Loosen setscrew on bracket bar (1) and insert the electrical wire from pendant.
3. Set the height of the pendant with the setscrew on the bracket bar (1). Tighten setscrew securely.
4. Attach bracket bar to outlet box using two box screws (3).
5. Make electrical connections according to all applicable local codes.
6. Slide canopy up to the ceiling and tighten in place with canopy screw (7).

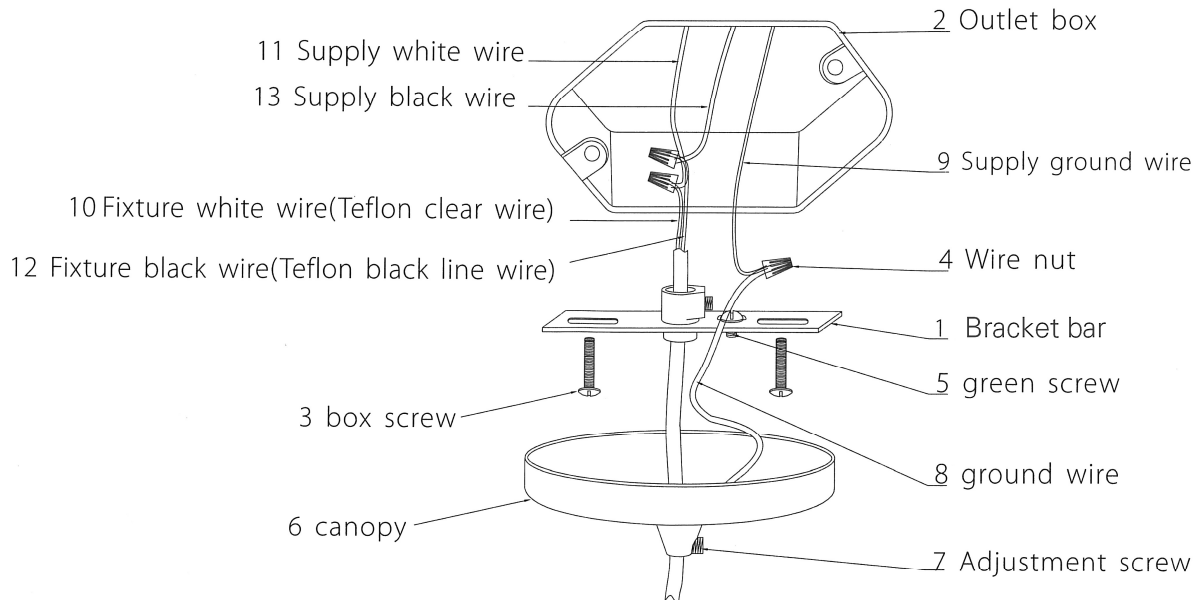

REFER TO INSTRUCTIONS PACKAGED WITH THE PENDANT ASSEMBLY FOR IMPORTANT INFORMATION